

# S725TX MINI SKID STEER



**EFFICIENCY AND PRODUCTIVITY ARE NOW MADE EASY** with a single pilot-operated ground drive joystick, which allows for a smooth range of motion. Additionally, a conveniently placed auxiliary lever by the loader arm controls, allows operators to multitask.




**THE NARROW FOOTPRINT** enhances maneuverability and access through narrow spaces such as backyard gates. Choose between 7" (17.8 cm) or 9" (22.9 cm) wide tracks.



**ISO-RATED OPERATING CAPACITY** for the S725tx is 750 lbs (340.2 kg). With a rated tipping load of 2145 lbs (973 kg), this small footprint machine positions itself as an exceptional mini skid steer. Additionally, the S725tx leads the industry with a lift height (to hinge pin) of 84.5" (214.6 cm).



**A DUAL HYDRAULIC AUXILIARY** option adds a second dedicated low-flow hydraulic circuit to optimize operator efficiency when powering attachments.

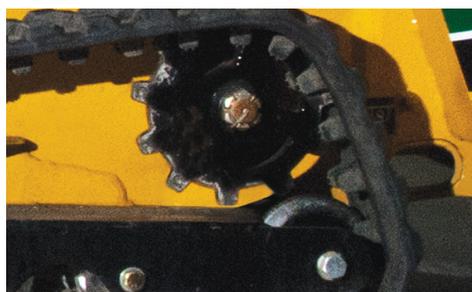

**LOWER YOUR COST OF OPERATION** with a high mounted track sprocket. The higher mounting reduces premature wear and tear in rocky soil conditions, while the ADI cast sprocket is heat-treated for longer life.



**A DEDICATED SPRING-CUSHIONED PLATFORM** keeps the operator out of the mud. The integrated operator presence system suspends ground drive and powered boom/bucket motion when the operator steps off the platform.



[VERMEER.COM](http://VERMEER.COM)



**EQUIPPED TO  
DO MORE.™**

# S725TX MINI SKID STEER

## GENERAL

Length: 84" (213.4 cm)

Width: 36" (91.4 cm)

Height: 57" (144.8 cm)

Weight: 2880 lbs (1306.3 kg)

Hinge pin height: 84.5" (214.6 cm)

Ground clearance: 6" (15.2 cm)

## ENGINE

Make/Model: Kubota V1505-E4B

Gross horsepower: 24.8 hp (18.5 kW)

Torque (max): 67.8 ft-lb (91.9 Nm)

Displacement: 91.41 cu in (1.5 L)

Fuel type: Diesel

Fuel tank capacity: 14.5 gal (54.9 L)

Number of cylinders: 4

Cooling medium: Liquid

Max engine operating angle: 30 degrees

## PERFORMANCE

SAE-rated operating capacity: 750 lb (340.2 kg)

Tipping load [with 175 lb (79.4 kg) operator]: 2145 lb (973 kg)

Max forward travel speed: 4.5 mph (7.2 km/h)

## HYDRAULIC SYSTEM

Hydraulic tank capacity: 11.5 gal (43.5 L)

Hydraulic system capacity: 11.5 gal (43.5 L)

Auxiliary pump high flow: 13.5 gpm (51.1 L/min)

Auxiliary pump low flow: 8.5 gpm (32.2 L/min)

Auxiliary pump relief: 2950 psi (203.4 bar)

Fittings: Quick coupler

## OPERATIONAL/ELECTRICAL

Steering: Single pilot-operated joystick

Lift and curl: Single dual-axis

Auxiliary electrical power port

## SAFETY

Operator presence system

Lift arm cylinder lock

Hydraulic parking brake

## OPTIONS

Dual auxiliary hydraulic circuits

Track width: 36" (91.4 cm) wide with 7" (17.8 cm) tracks or  
40.5" (102.8 cm) wide with 9" (22.9 cm) tracks

Extended warranty

Special paint

Planned maintenance

Confidence Plus® Asset Protection Program

**NOTES:**

---

---

---

---

Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo, Equipped to Do More and Confidence Plus are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. © 2014 Vermeer Corporation. All Rights Reserved. Printed in the U.S.A. Please recycle.

